DC-DC
CONVERTERS

Models D & E

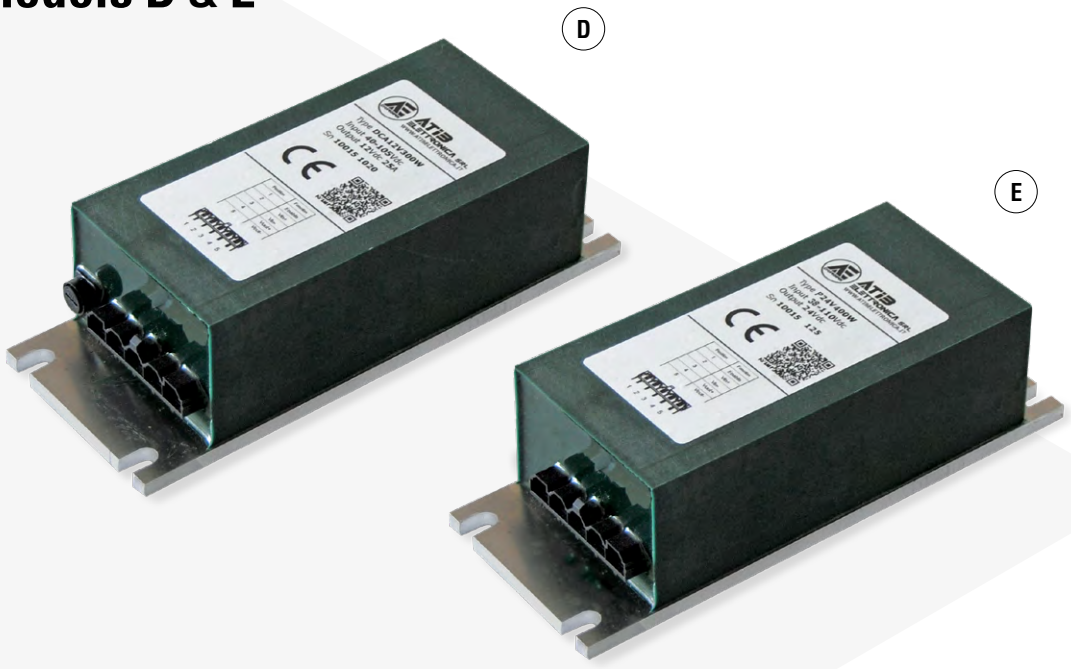

MODELS AVAILABLE

V	Power (W)	A	Input Voltage range	Case	CODE	Parallel connection	Galvanic isolation	Certifications
12	300	25,0	40-105	D	**DCA12V300W**	X	✓	CE in conformity with LV and EMC protocols
24	300	12,5	40-105	D	**DCA24V300W**	X	✓	
24	400	16,6	38-110	E	**P24V400W**	X	X	

SAFETY FEATURES

	D	E
Output crowbar protection	internal limit.	✓
Output short circuit protection	✓	✓

MECHANICAL CHARACTERISTICS

Weight	1,2 kg
Dimensions (LxWxH)	190 x 76 x 50 mm
Technical specification	See technical drawings
Protection degree	IP65